


# Steel 3-Drawer Locker Manual

## ASSEMBLY / OPERATION

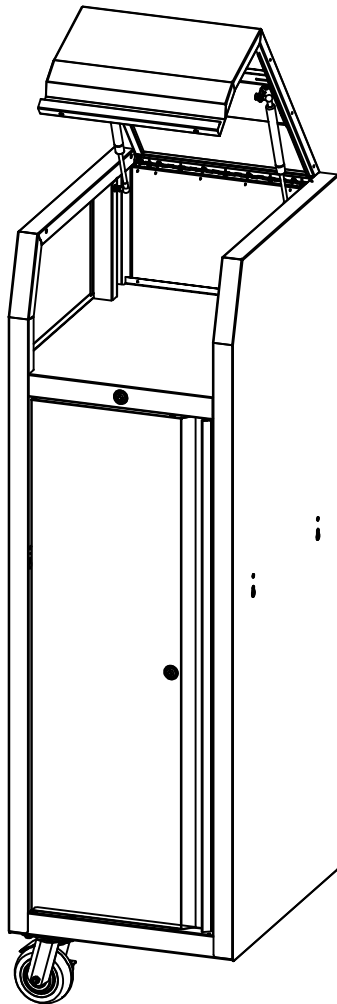

### CAPACITIES


- The maximum load that can be placed in each single slide drawer/shelf is 100 lbs.
- The maximum load for the Locker is 400 lbs.

. 1 .

### ■ FIRST

#### INSTALL HOOKS AND PASTE THE EVA PADS


Simply position the hooks over the holes on your side Locker (included in the product) and attach with the bolts provided. Tighten securely. Paste two EVA pads on the right side of the locker.

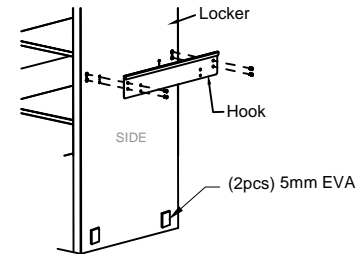

### ■ SECOND

#### INSTALL THE CASTERS

Carefully lay bottom locker on its back using a soft mat under the back for protection. Position the two swivel casters on the bottom of the locker (Please pay attention for the casters position when you confirm which side you perfect to place the locker), insert M8x25 bolts through washers, then through the casters and into the bottom of the locker. Tighten securely using a 14mm socket.



### ■ THIRD

#### LOCKER AND CABINET CONNECTION:

NOTE: Attach this side locker to a roller cabinet using the hardware provided. This product is not designed to be used as a stand-alone.


CAUTION: If not properly attached to a roller cabinet, it could tip over, which may cause personal or product damage.

Step 1: Hand the locker on the rolling cabinet.

Step 2: Make sure the hook head snapping in the square hole on the inner side of the locker, then fasten the screws to the cabinet.

Step 3: Undo the hexagon-head bolt on the cabinet caster near the corners.

Step 4: Position the connecting channels on the bottom of the Locker and fasten the first screw to the locker. And then fasten the second screw to the cabinet.

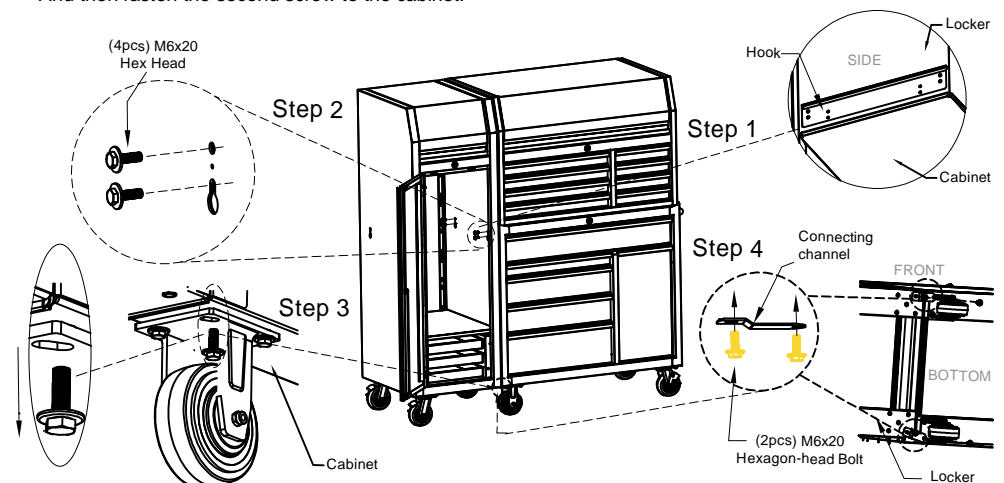


. 2 .

## ■ FOURTH

### INSTALL SHELVES:

Insert and slide the shelf support into the holes. Carefully lay the shelf onto the 4-shelf support.

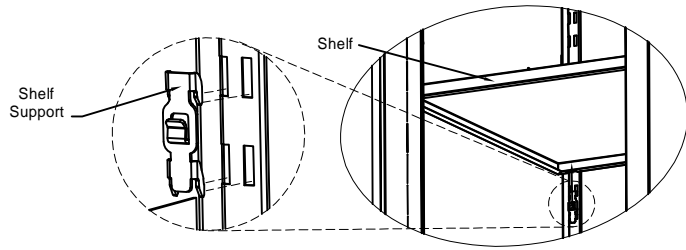


### DOOR REVERSAL INSTRUCTION

The door is pre-installed with the hinge on the left side of the locker.

Step 1: To install the door on the right, pull down/up the hinge pin and remove the door from the main body. Remove the magnet and reinstall on the left side of the locker.

Step 2: Turn the door upside down and put the door in position on the right side of the locker and insert the hinge pin into the holes on the top/bottom side.

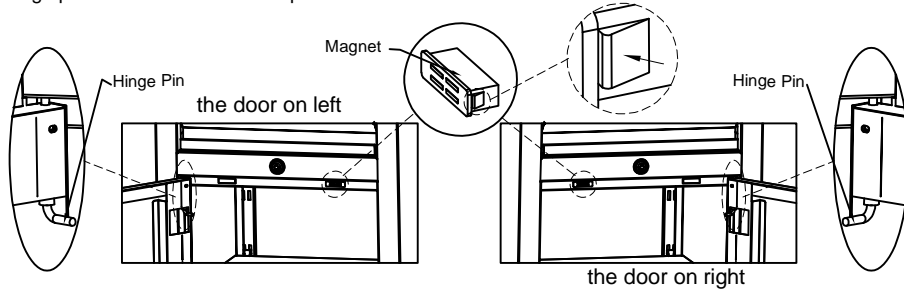

### TO REMOVE AND REPLACE DRAWERS


#### TO REMOVE DRAWERS

Pull drawer out so it's almost fully extended.


Push up one hand black release lever, while pushing down the other hand black release lever.

While holding the levers in the positions as instructed above, pull the drawer outward until it is released from the drawer slide.

PUSH UP  
(ONE HAND SIDE LEVER)

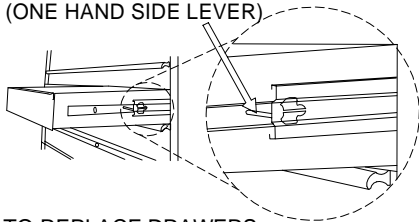

PUSH DOWN  
(THE OTHER HAND SIDE LEVER)

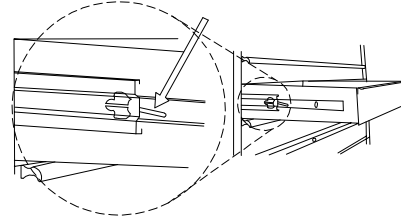


#### TO REPLACE DRAWERS

Extend the drawer slides from the tool chest.

Insert the brackets on each side of the drawer into the slots in the cabinet slides, being careful that they are properly positioned.

Once properly inserted, completely close the drawer to set the slides in their proper positions.

## Locker


 "The keys are taped to the till of the locker."

### PARTS LIST

Ref#	Description	Part#	QTY
1	Gas Strut	303225	2 pcs
* 2	Till Liner	552352	1 pc
** 3	Lock	304071	2 pcs
*** 4	Door Pull	3011017	1 pc
**** 5	Shelf Liner	552353	3 pcs
***** 6	Shelf	245535	2 pcs
7	Slide(L)	300064	3 pcs
***** 8	Drawer Liner	552354	3 pcs
9	Swivel Caster	302000	2 pcs
10	Slide(R)	300065	3 pcs

### Numbers of colored parts:

Description	White	Green
* Till Liner	552352	552355
** Lock	304071	304072
*** Door Pull	3011017	3011018
**** Shelf Liner	552353	552356
***** Shelf	245535-520	245535-517
***** Drawer Liner	552354	552357

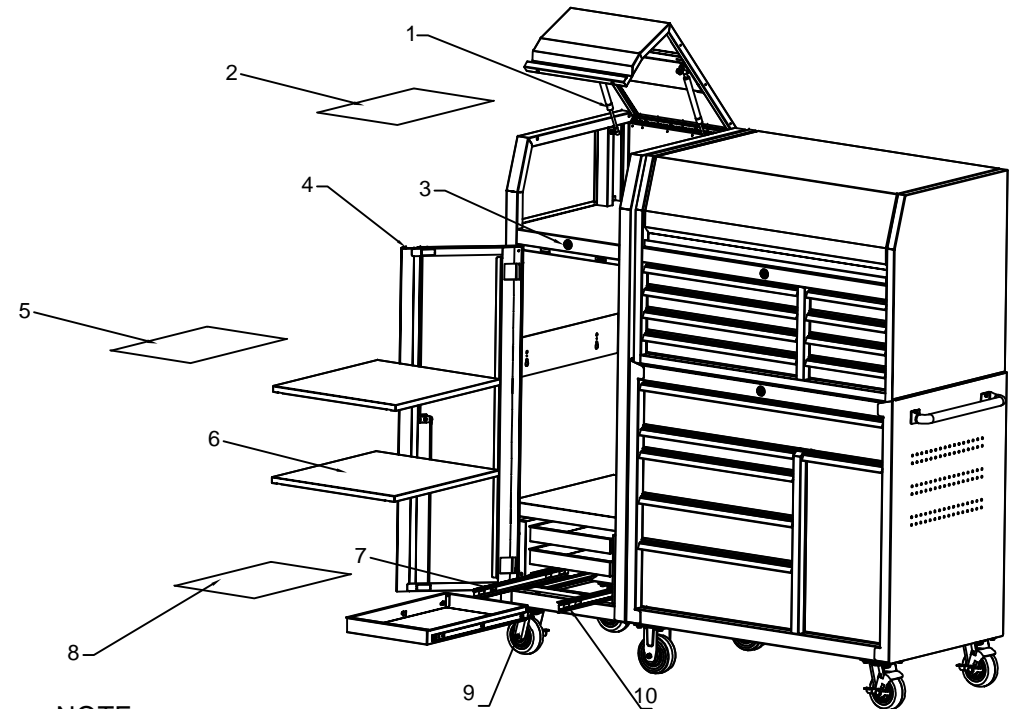

### NOTE

1. Replacement keys may be ordered, the code which appears on the face of the lock required.
2. Give the information for spare parts: part number, and quantity.