



60in Workstation Manual

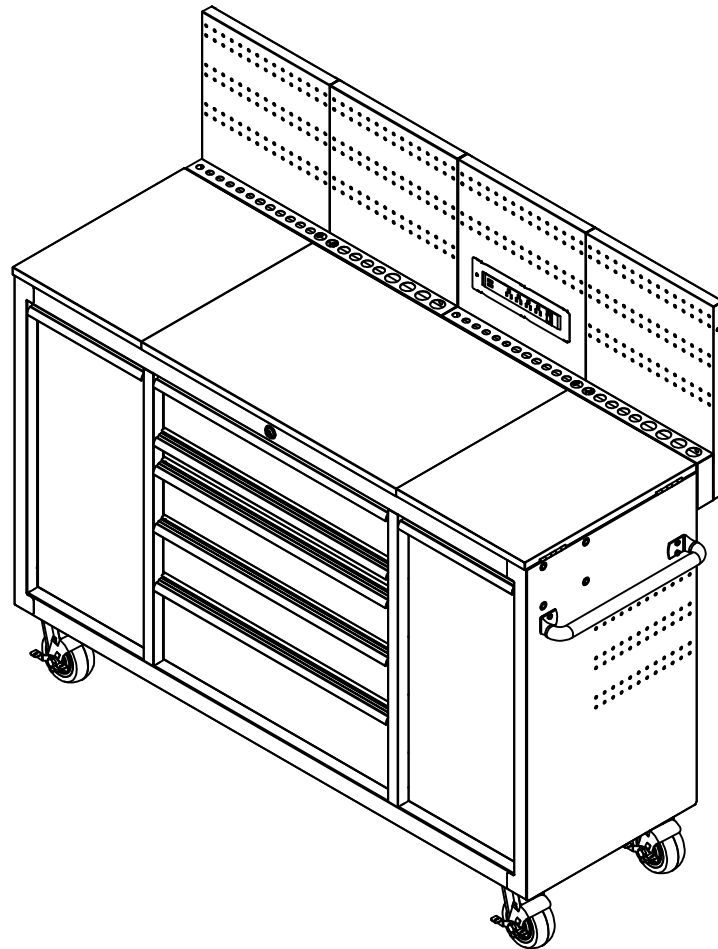

ASSEMBLY INSTRUCTIONS


FIRST INSTALL HANDLES

Simply position the handles over the holes and attach with the bolts provided. Tighten securely.

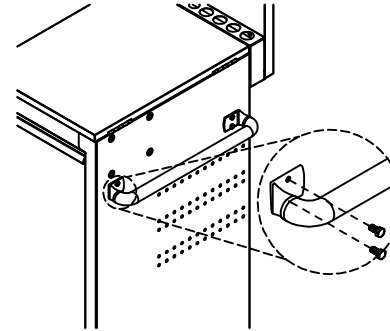

SECOND INSTALL CASTERS

Carefully lay bottom cabinet on its back, with a soft mat under the back for protection. Position the swivel casters on the bottom of the cabinet. Insert the bolts through washers, then through the casters and into the bottom of the cabinet. Tighten securely.




TO REMOVE AND REPLACE DRAWERS


TO REMOVE DRAWERS

Pull drawer out so it's almost fully extended. Push up one hand black release lever, while pulling down the other hand black release lever. While holding the levers in the positions as instructed above, pull the drawer outward until it is released from the drawer slide.

PUSH UP (ONE HAND SIDE LEVER)

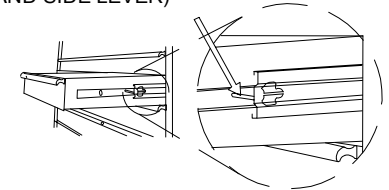

PUSH DOWN (THE OTHER HAND SIDE LEVER)

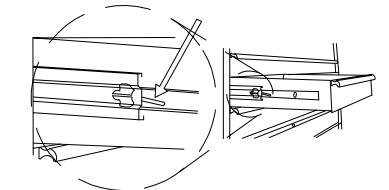


TO REPLACE DRAWERS

Extend the drawer slides from the tool chest/cabinet. Insert the brackets on each side of the drawer into the slots in the slides, being careful that they are positioned properly. Once properly inserted, completely close the drawer / work top to set the slides in their proper positions.

RAISE AND RELEASE DRAWER FRONTS:

These units are equipped with the raise and release drawer fronts. To open, lift up on the drawer front while pulling towards you. To close, shut the drawer firmly until the latch engages. If the drawer does not stay closed, the hook may be bent, or it may rub against the drawer slides. To fix this problem, lightly bend the hook until the drawer will engage in the slide.

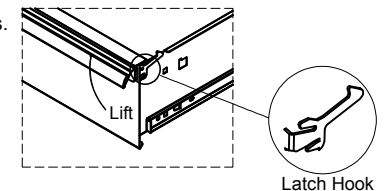


Latch Hook

Cabinet



" The keys are taped to the inside of bottom drawer of the cabinet."

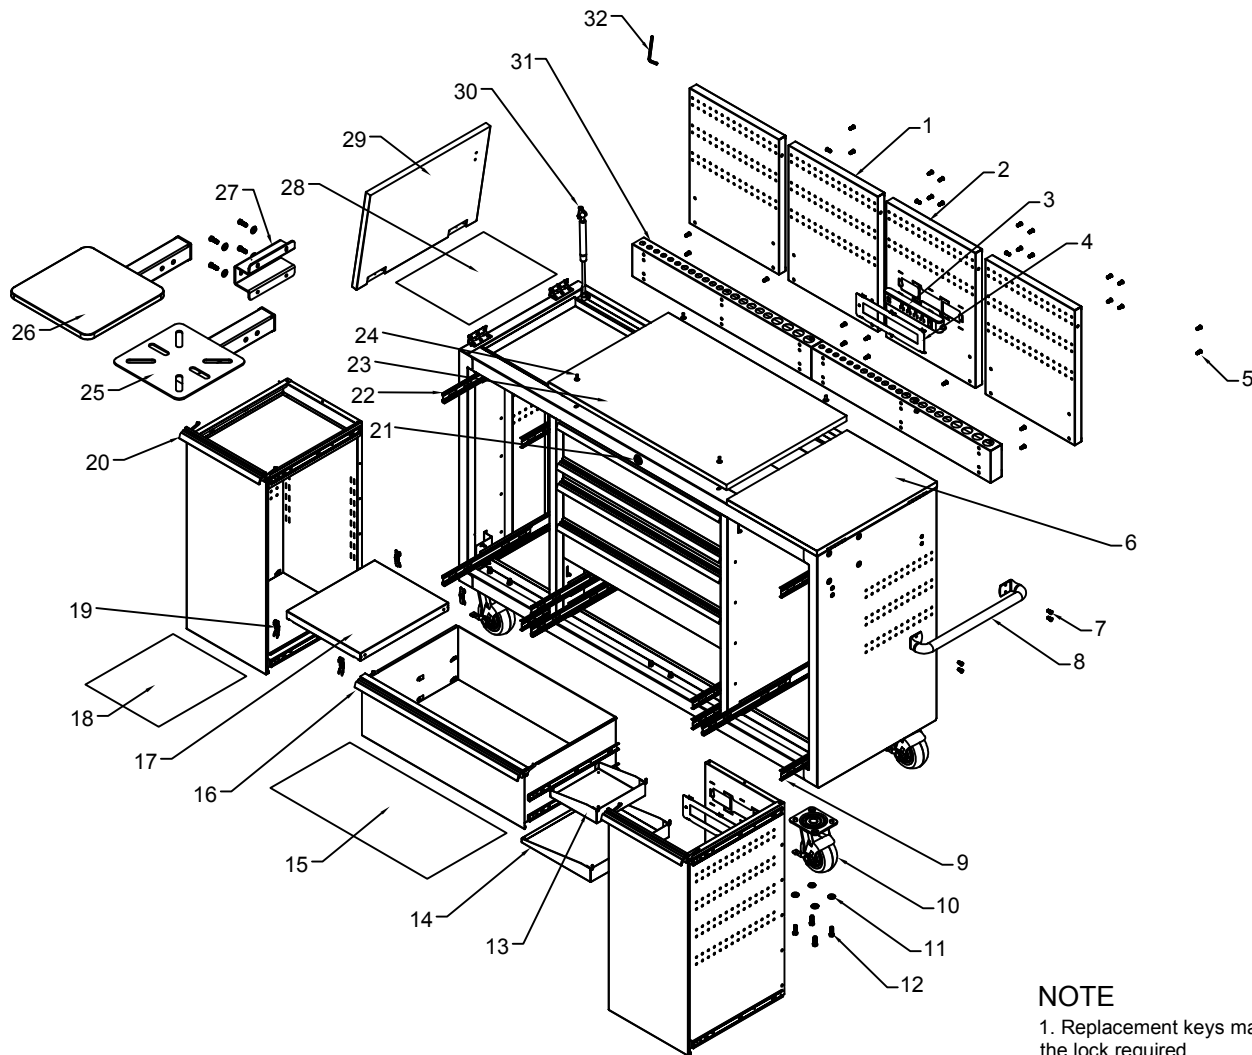

PARTS LIST

Ref#	Description	Part#	QTY
1	Pegboard	246019	3 pcs
2	Pegboard	246020	1 pc
3	Power Strip	333059	1 pc
4	Sealing plate	240940	2 pcs
5	M6x16 Hex Socket Head Screw	320327	29 pcs
6	Work Top(R)	307074	1 pc
7	M6x12 Hex Bolt	321051	4 pcs
* 8	Handle	306068	1 pc
9	Slide(R)	300023	13 pcs
* 10	Swivel Caster	302265	4 pcs
11	Washer	324002	24 pcs
12	M8x25 Hex Bolt	321047	24 pcs
13	Tray (Small)	123689	1 pc
14	Tray (Big)	116353	1 pc
* 15	Drawer Liner	552464	5 pcs
* 16	Drawer Pull	3011013	5 pcs
17	Shelf	246036	1 pc
* 18	Liner	552465	3 pcs
19	Shelf Support	243311	4 pcs
* 20	Drawer Pull	3011028	2 pcs
* 21	Lock	304262	1 pc
22	Slide(L)	300022	12 pcs
23	Work Top	307072	1 pc
24	M6x16 Phillips Head Bolt	320174	4 pcs
25	Vice Mount Bracket (to be ordered separately)	KP000084T	1 pc
26	Shelf Bracket (to be ordered separately)	KP000085T	1 pc
27	U Shaped Bracket	246021	2 pcs
* 28	Liner	552466	2 pcs
29	Work Top(L)	307073	1 pc
30	Gas Strut	303157	2 pcs
31	Trough	246018	2 pcs
32	Hex Wrench (Hex Key)	317023	1 pc

NOTE

1. Replacement keys may be ordered, the code which appears on the face of the lock required.
2. Give the information for service parts: part number, and quantity.
3. Numbers of colored parts:

*	8 Handle	10 Swivel Caster	15 Drawer Liner	16 Drawer Pull	18 Liner	20 Drawer Pull	21 Lock	28 Liner
Black	306068	302265	552464	3011013	552465	3011028	304262	552466
Pink	306046	302000	552468	301247	552469	3011030	304070	552470